


Patented product 专利产品

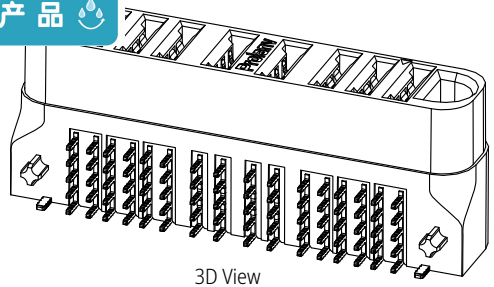



3D View


Typical Mating Sequence

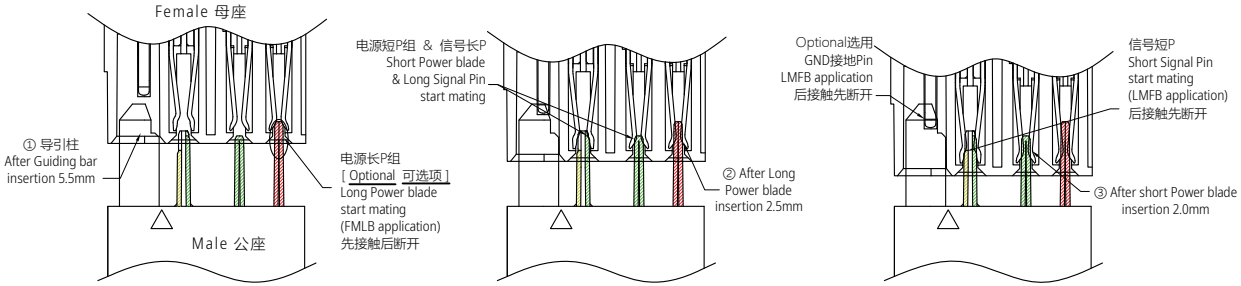


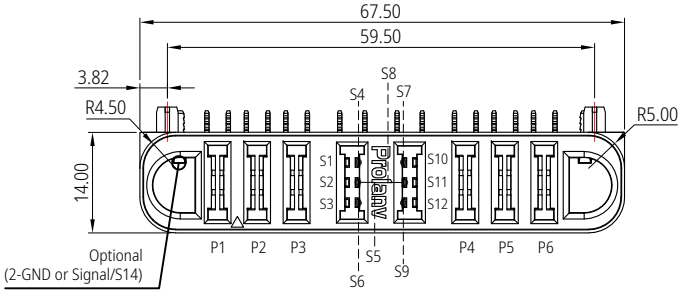

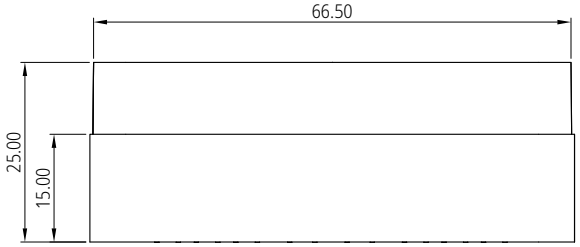

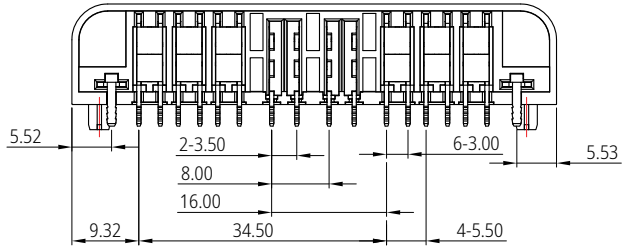



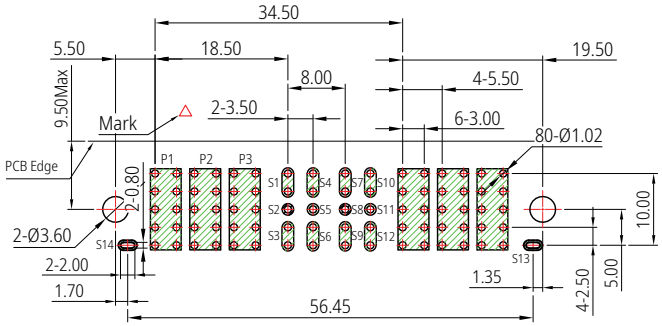

Recommended P.C.B layout

Tolerance ±0.05


Notes:

1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade, 120v DC/signal pin;
   3-2. Current Rating: 60A (per pair power blade), 3A (per signal pin).
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade);
   initial 10mΩ max., finished 20mΩ maximum change.(per signal pin).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/power blade; 500v DC rms/signal pin.
   3-5. Insulation Resistance:
   5000 MΩ min/Power blade; 500 MΩ min/Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 19.6N (2.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 4.5~11N (0.4~1.2kgf)/Per Pair;
   4-3. Durability Life: 10,000 cycles. max.
5. Waterproof level ≧IPX6 in the mated connector module state.
6. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
7. Operating Temperature rang: -40~125°C.
8. All parts RoHS and Reach compliant.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION


GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®
.X ± 0.30	X.°± 3°	PDC1820F0001	
.XX ± 0.20	.X°± 2°	APPROVED BY: Henry	TITLE: EN60A series | Power Female. 6PW/12+2S, R/A DIP Type
.XXX ± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY: Poplar	DWG NO.: PDC18-20
SIZE: A4	UNITS: mm[only]	DRAWN BY: Tang	SHEET: 1 / 2 · SCALE: 1:1 · REV: A0

Copyright Shenzhen Prolanv Inc. www.prolanv.com





20 Pcs/Tray

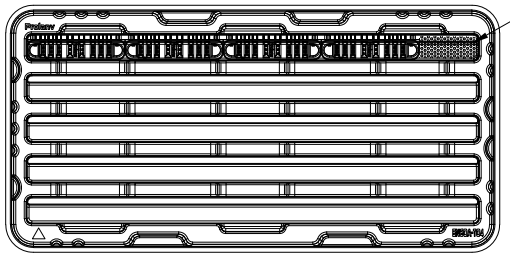

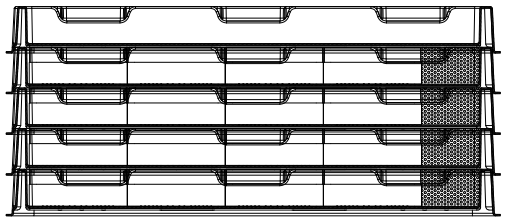

Total: 2x4Layers

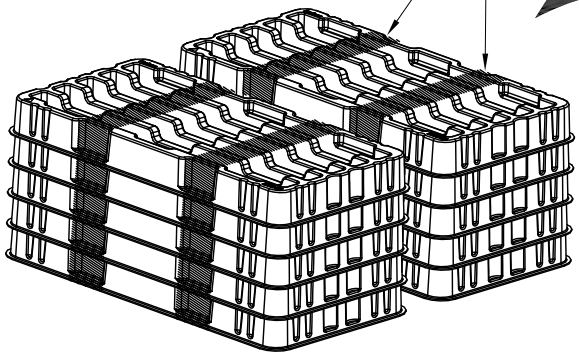

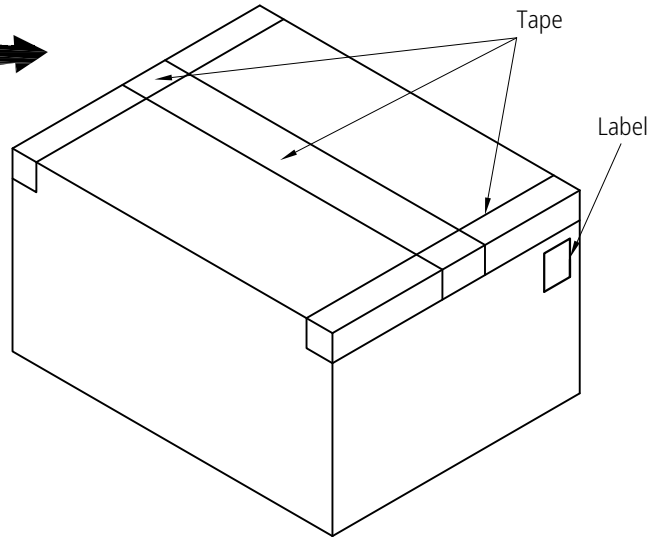

Notes:

1. Q'ty:20 Pcs/Tray, 2x4 Layers=160 Pcs/Carton.
2. Tray Pallet size: 340*170mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®
X± 0.30	X.°± 3°	PDC1820F0001	
.XX± 0.20	.X°± 2°	APPROVED BY Henry	TITLE EN60A series | Power Female. 6PW/12+2S, R/A DIP Type Packaging
.XXX± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY Poplar	DWG NO. P-PDC18-20
SIZE	UNITS	DRAWN BY Tang	SHEET 2 / 2 | SCALE NA | REV A0
A4	mm[only]		

Copyright Shenzhen Prolanv Inc. www.prolanv.com