




Patented product
专利产品

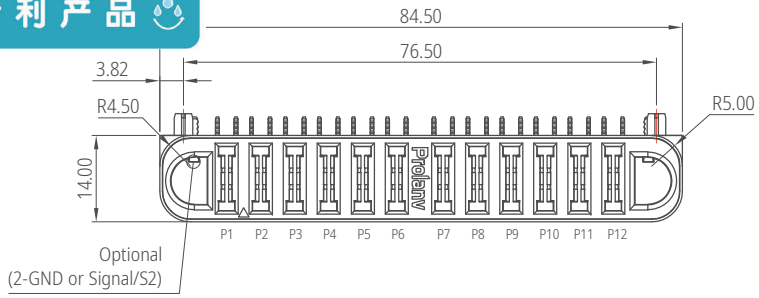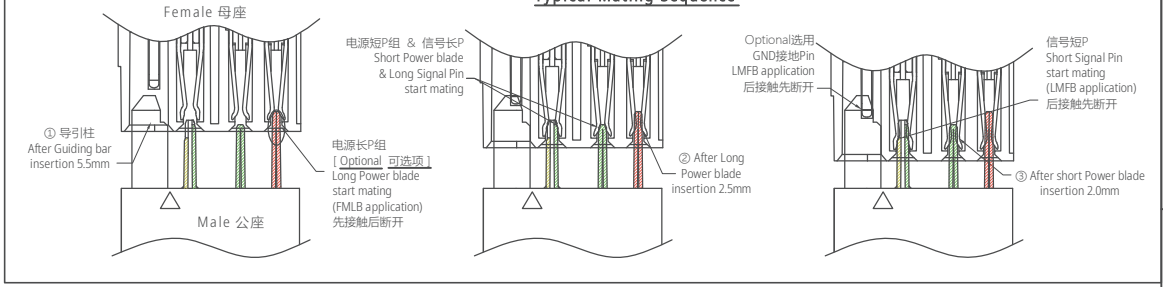


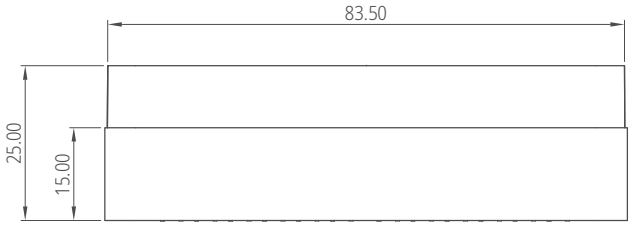


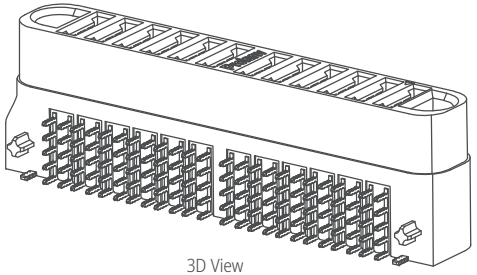


3D View

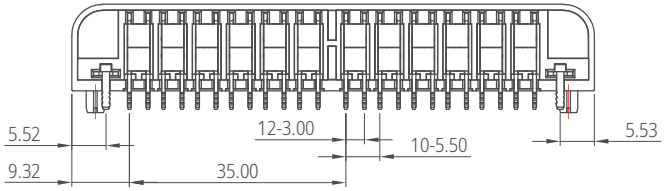



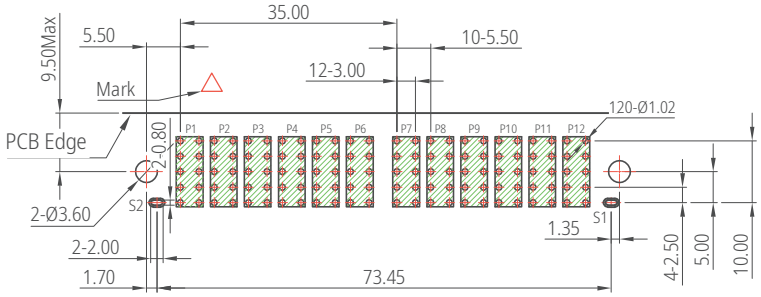


Recommended P.C.B layout
Tolerance ±0.05

Notes:
1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade;
   3-2. Current Rating: 60A (per pair power blade).
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade);
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/power blade; 500v DC rms/signal pin.
   3-5. Insulation Resistance:
   5000 MΩ min/Power blade; 500 MΩ min/Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 19.6N (2.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 4.5~11N (0.4~1.2kgf)/Per Pair;
   4-3. Durability Life: 10,000 cycles. max.
5. Waterproof level ≧IPX6 in the mated connector module state.
6. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
7. Operating Temperature rang: -40~125°C.
8. All parts RoHS and Reach compliant.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION


GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®
.X± 0.30	.X°± 3°	PDC3020F0001	
.XX± 0.20	.X°± 2°	APPROVED BY: Henry	TITLE: EN60A series | Power Female. 12PW/2S, R/A DIP Type
.XXX± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY: Poplar	DWG NO.: PDC30-20
SIZE: A4	UNITS: mm[only]	DRAWN BY: Tang	SHEET: 1 / 2 · SCALE: 1:1 · REV: A0


Copyright Shenzhen Prolanv Inc. www.prolanv.com




15Pcs/Tray

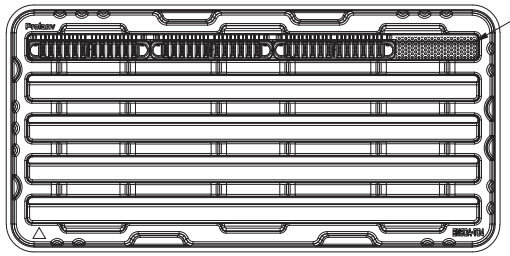




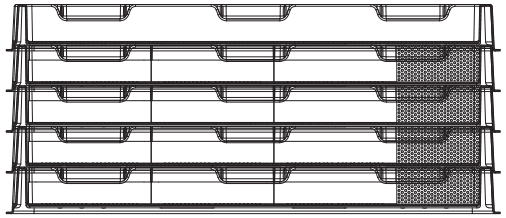

Total: 2x4Layers

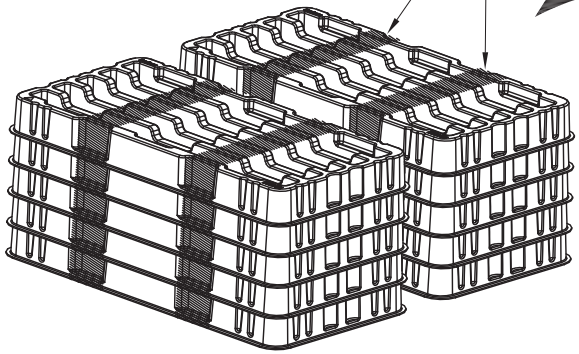

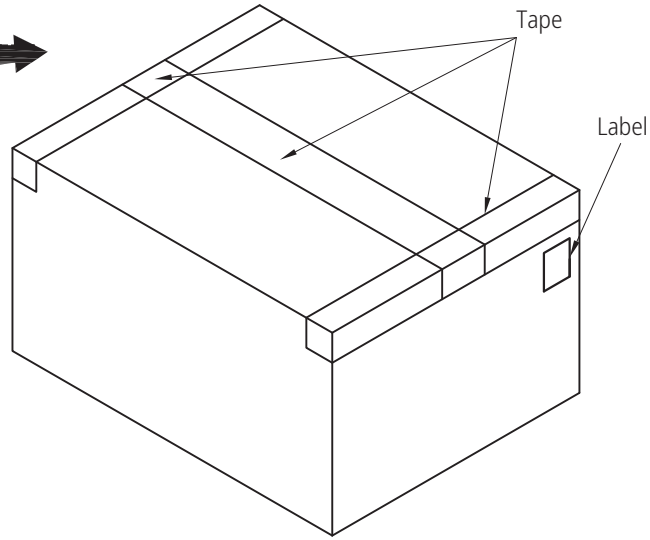

Notes:

1. Q'ty:15 Pcs/Tray, 2x4 Layers=120 Pcs/Carton.
2. Tray Pallet size: 340*170mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED .X± 0.30 / X.°± 3° .XX± 0.20 / .X°± 2° .XXX± 0.10 / .XX°± 1°	PART NO. PDC3020F0001	Prolanv®
		APPROVED BY Henry	TITLE EN60A series | Power Female. 12PW/2S, R/A DIP Type Packaging
	CUSTOMER DRAWING	CHECKED BY Poplar	DWG NO. P-PDC30-20
	SIZE A4 / UNITS mm[only]	DRAWN BY Tang	SHEET 2 / 2 / SCALE NA / REV A0

Copyright Shenzhen Prolanv Inc. www.prolanv.com