



Patented product 专利产品

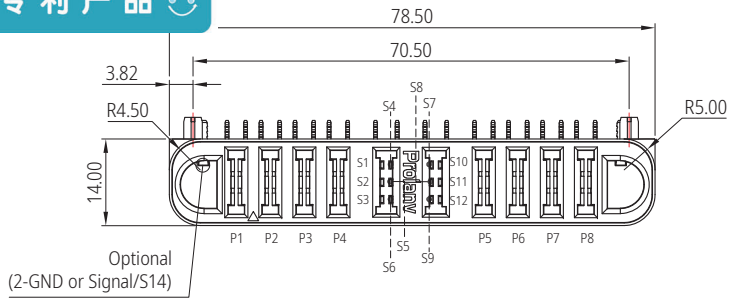


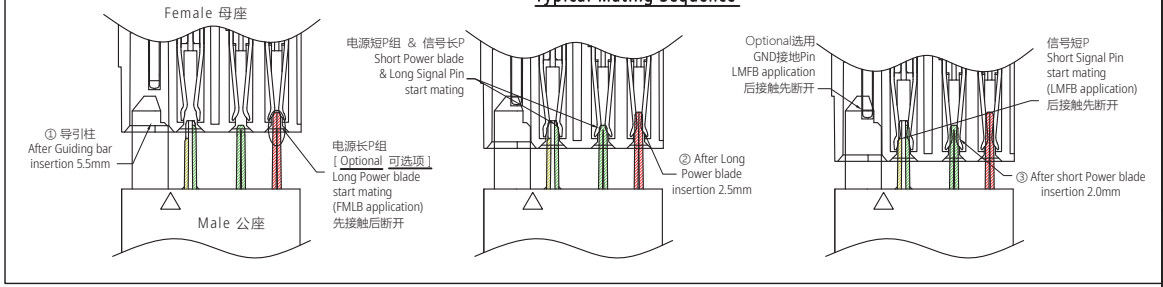


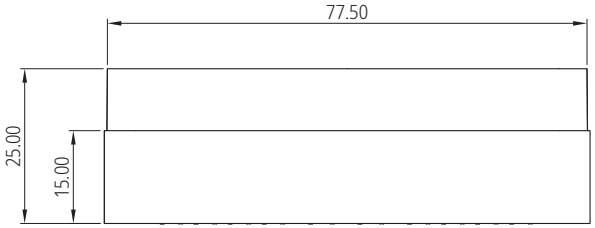


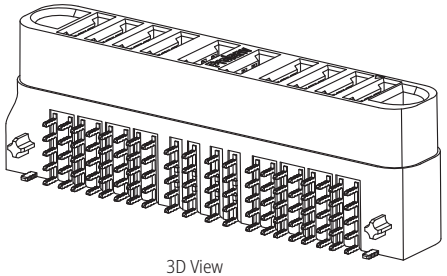

3D View

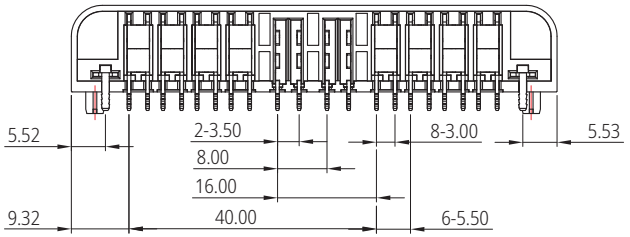



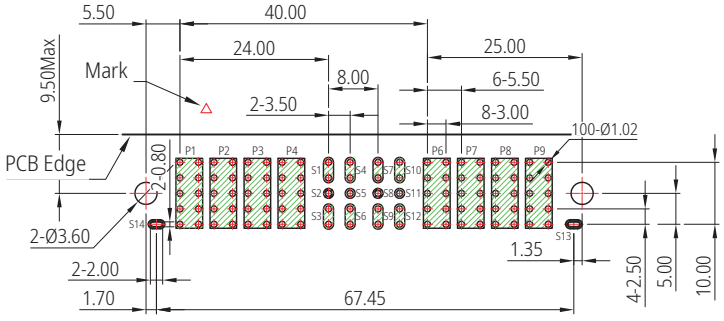

Recommended P.C.B layout
Tolerance ±0.05

Notes:
1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade, 120v DC/signal pin;
   3-2. Current Rating: 60A (per pair power blade), 3A (per signal pin).
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade);
   initial 10mΩ max., finished 20mΩ maximum change.(per signal pin).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/power blade; 500v DC rms/signal pin.
   3-5. Insulation Resistance:
   5000 MΩ min/Power blade; 500 MΩ min/Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 19.6N (2.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 4.5~11N (0.4~1.2kgf)/Per Pair;
   4-3. Durability Life: 10,000 cycles. max.
5. Waterproof level ≧IPX6 in the mated connector module state.
6. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
7. Operating Temperature rang: -40~125°C.
8. All parts RoHS and Reach compliant.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			
.X ± 0.30		X.° ± 3°	
.XX ± 0.20		.X° ± 2°	
.XXX ± 0.10		.XX° ± 1°	
CUSTOMER DRAWING			
SIZE	UNITS		
A4	mm[only]		


PART NO.	PDC2820F0001
APPROVED BY	Henry
CHECKED BY	Poplar
DRAWN BY	Tang

Prolanv®


TITLE	EN60A series | Power Female. 8PW/12+2S, R/A DIP Type
DWG NO.	PDC28-20


SHEET	SCALE	REV
1 / 2	1:1	A0


Copyright Shenzhen Prolanv Inc. www.prolanv.com

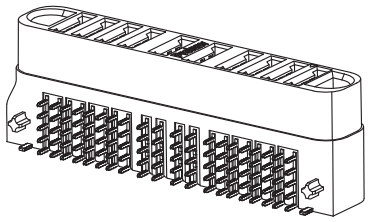


15Pcs/Tray

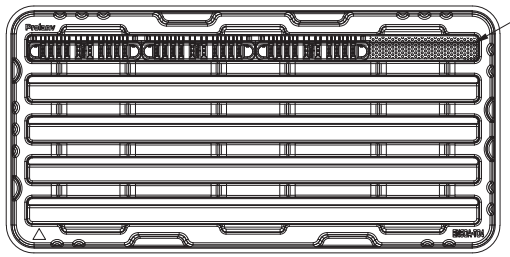




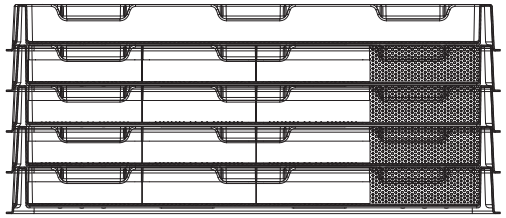

Total: 2x4Layers

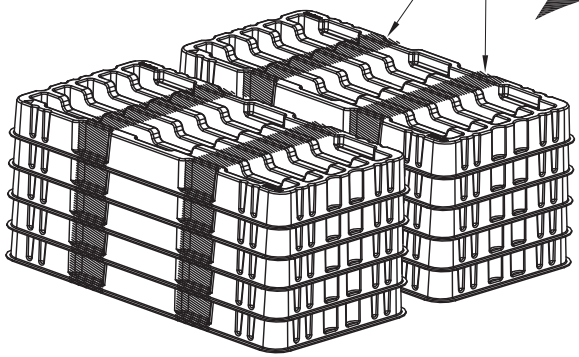

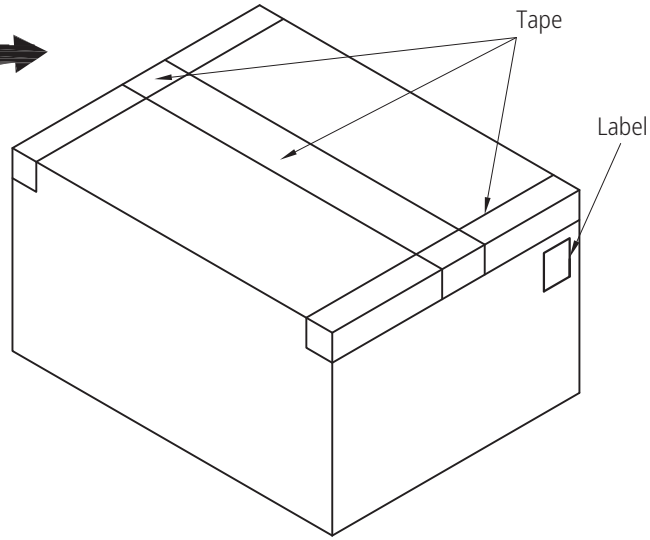

Notes:

1. Q'ty:15 Pcs/Tray, 2x4 Layers=120 Pcs/Carton.
2. Tray Pallet size: 340*170mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®
X± 0.30	X.°± 3°	PDC2820F0001	
.XX± 0.20	.X°± 2°	APPROVED BY: Henry	TITLE: EN60A series | Power Female. 8PW/12+2S, R/A DIP Type Packaging
.XXX± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY: Poplar	DWG NO.: P-PDC28-20
SIZE: A4	UNITS: mm[only]	DRAWN BY: Tang	SHEET: 2 / 2 · SCALE: NA · REV: A0

Copyright Shenzhen Prolanv Inc. www.prolanv.com