


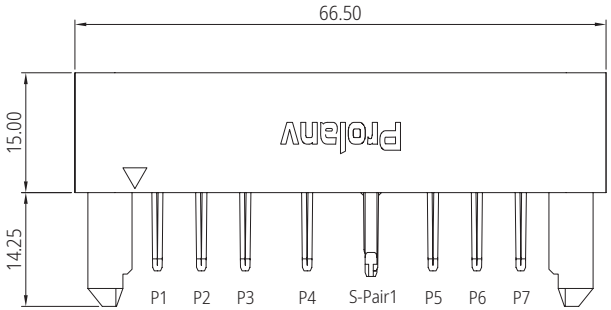
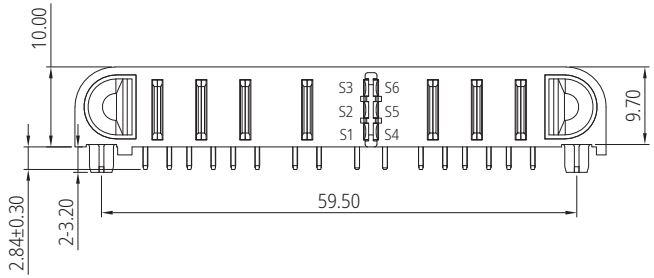


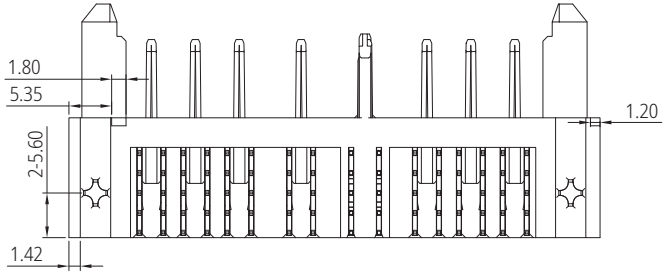



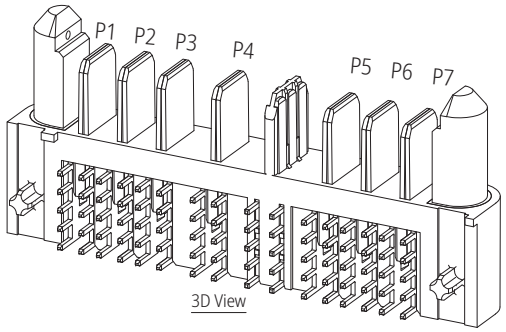


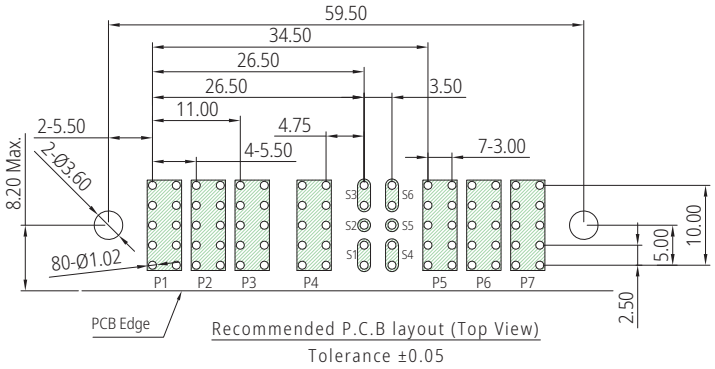

## Typical Mating Sequence

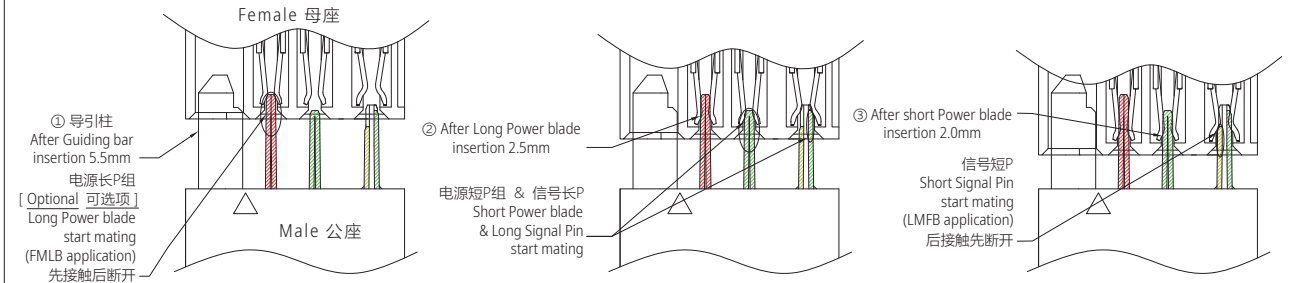


Notes:
1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
   1-3. Metal Rod: Alloy.
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
   2-2. Metal Rod: Nickel overall.
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade, 120v DC/signal pin;
   3-2. Current Rating: 60A/Per pair power blade, 3A/Per Signal Pin.
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade);
   initial 10mΩ max., finished 20mΩ maximum change.(per signal pin).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/power blade; 500v DC rms/signal pin.
   3-5. Insulation Resistance:
   5000 MΩ min/Power blade; 500 MΩ min/Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 19.6N (2.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 4.5~11N (0.4~1.2kgf)/Per Pair;
   4-3. Durability Life: 10,000 cycles. max.
5. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
6. Operating Temperature rang: -40~125°c.
7. All parts RoHS and Reach compliant.

**Part Number: PDC2510F0003**

- Optional Long Power blade 可选项 长电源P组数 | Pairs Code: 1~9 & A~C
- Long Power blade 长电源P组 | 起始位 Start location code: 1~9 & A~C
- Long Power blade 长电源P组 | 终止位 End location code: 1~9 & A~C

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

| GENERAL TOLERANCES UNLESS SPECIFIED | | | |
|---|---|---|---|
| .X ± | 0.30 | X.° ± | 3° |
| .XX ± | 0.20 | .X° ± | 2° |
| .XXX ± | 0.05 | .XX° ± | 1° |

| | |
|---|---|
| CUSTOMER DRAWING | |
| SIZE | UNITS |
| A4 | mm[only] |

| | |
|---|---|
| PART NO. | PDC2510F0003 |
| APPROVED BY | Henry |
| CHECKED BY | Poplar |
| DRAWN BY | Kaylee |


Prolanv®

TITLE: EN60A series | Power Male. 7PW+6S, R/A DIP Type


DWG NO. PDC25-03

| SHEET | SCALE | REV |
|---|---|---|
| 1 / 2 | 1:1 | A1 |


Copyright **Prolanv** Inc. www.prolanv.com




20pcs/Tray

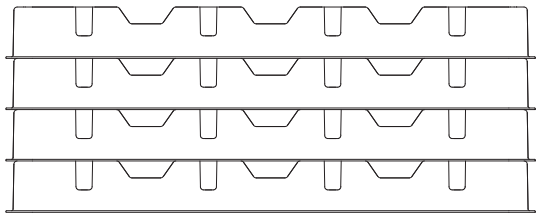


Total 2*3 Layers

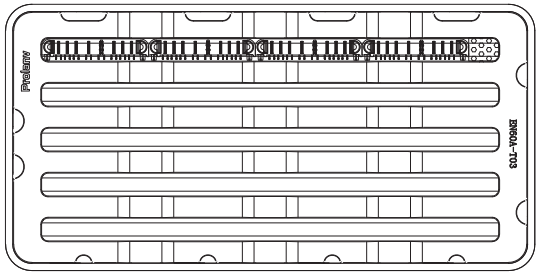



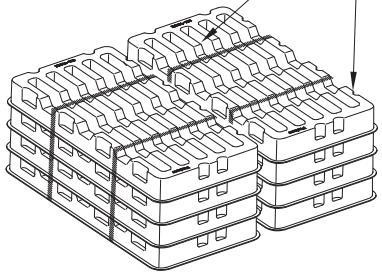

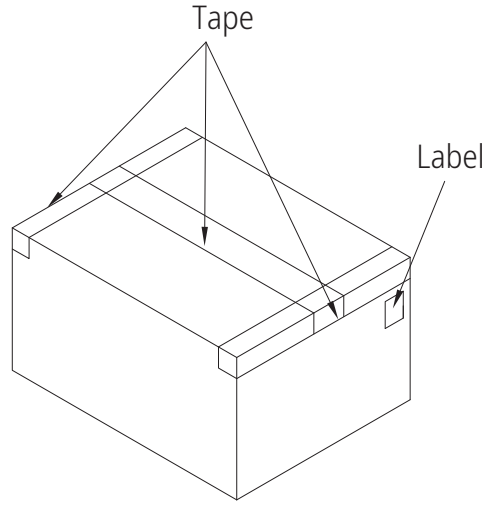
Notes:

1. Q'ty: 20Pcs/Tray, 2x3 Layers=120 Pcs/Carton.
2. Tray Pallet size: 332*162*17mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

| GENERAL TOLERANCES UNLESS SPECIFIED | | PART NO. | Prolanv® |
|---|---|---|---|
| X ± 0.20 | X.° ± 3° | PDC2510F0003 | |
| .XX ± 0.10 | .X° ± 2° | APPROVED BY Henry | TITLE EN60A series \| Power Male 7PW+6S, R/A DIP Type, Packaging |
| .XXX ± 0.05 | .XX° ± 1° | | |
| CUSTOMER DRAWING | | CHECKED BY Poplar | DWG NO. P-PDC25-03 |
| SIZE | UNITS | DRAWN BY Esther | SHEET 2 / 2 \| SCALE NA \| REV A1 |
| A4 | mm[only] | | |

Copyright **Prolanv** Inc. www.prolanv.com