


Patented product
专利产品

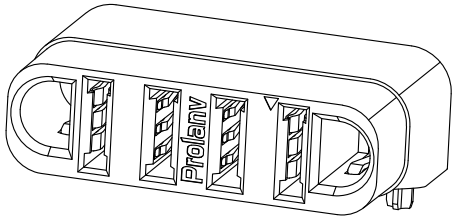


3D View


Typical Mating Sequence

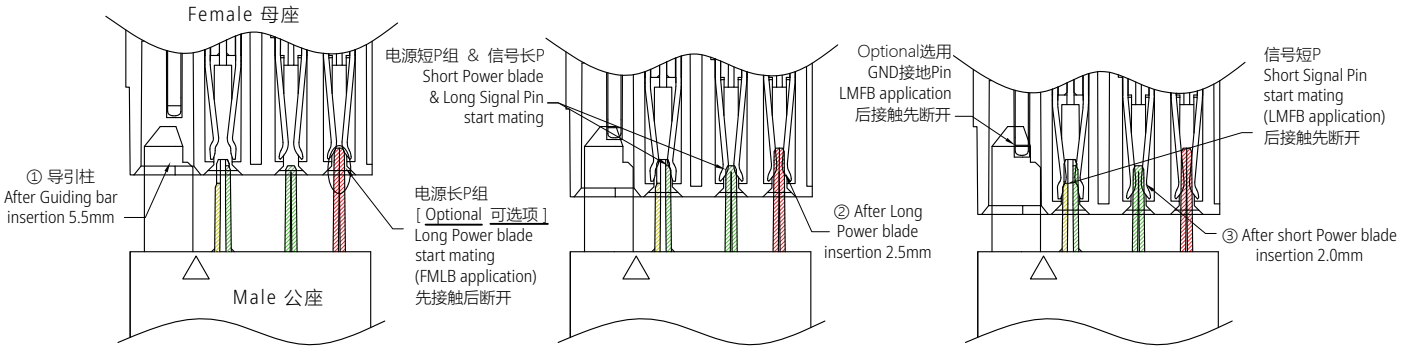


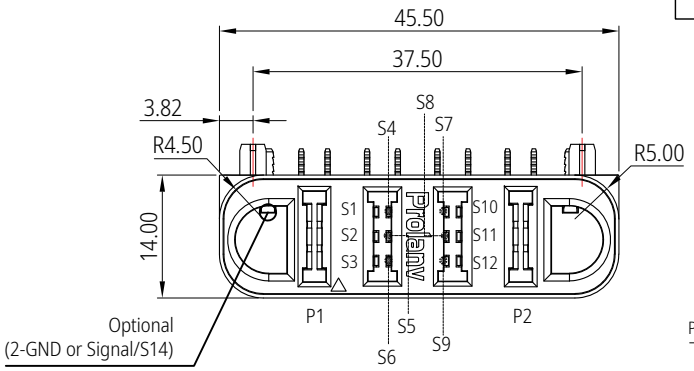


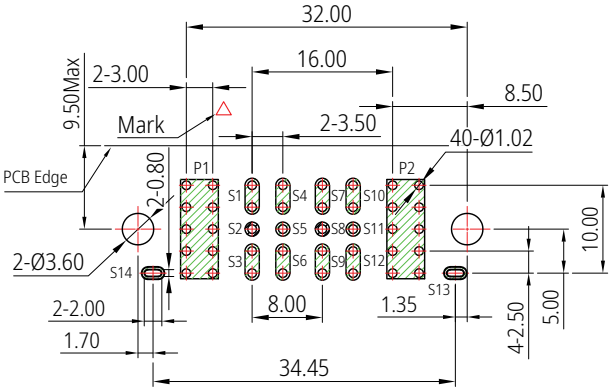

Recommended P.C.B layout
Tolerance ±0.05

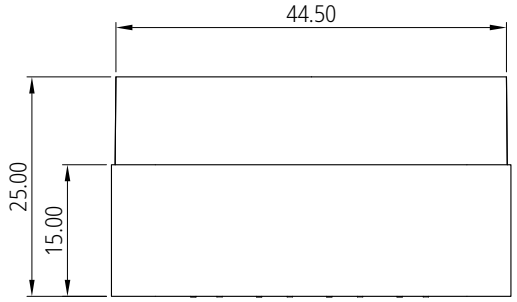

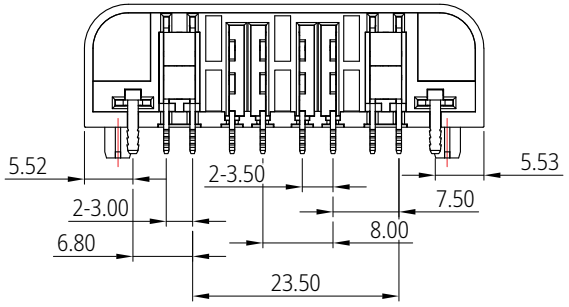




Notes:
1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade, 120v DC/signal pin;
   3-2. Current Rating: 60A (per pair power blade), 3A (per signal pin).
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade);
   initial 10mΩ max., finished 20mΩ maximum change.(per signal pin).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/power blade; 500v DC rms/signal pin.
   3-5. Insulation Resistance:
   5000 MΩ min/Power blade; 500 MΩ min/Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 19.6N (2.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 4.5~11N (0.4~1.2kgf)/Per Pair;
   4-3. Durability Life: 10,000 cycles. max.
5. Waterproof level ≧IPX6 in the mated connector module state.
6. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
7. Operating Temperature rang: -40~125°C.
8. All parts RoHS and Reach compliant.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION


GENERAL TOLERANCES UNLESS SPECIFIED			
.X ± 0.30	.X°± 3°	PART NO. PDC2420F0001	Prolanv®
.XX ± 0.20	.X°± 2°	APPROVED BY Henry	TITLE EN60A series | Power Female. 2PW/12+2S, R/A DIP Type
.XXX ± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY Poplar	DWG NO. PDC24-20
SIZE	UNITS	DRAWN BY Tang	SHEET 1 / 2 | SCALE 1:1 | REV A0
A4	mm[only]		


Copyright Shenzhen Prolanv Inc. www.prolanv.com




30 Pcs/Tray

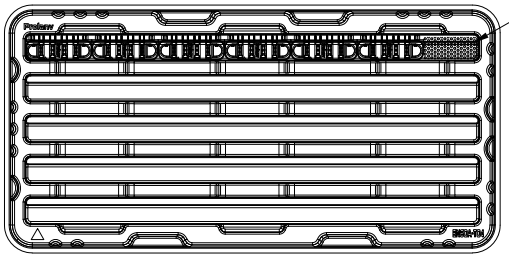




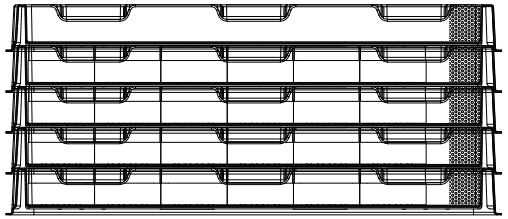

Total: 2x4Layers

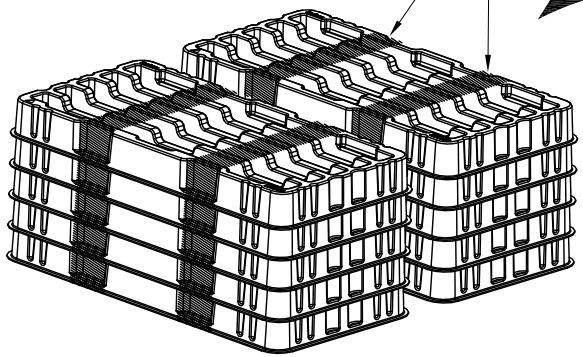

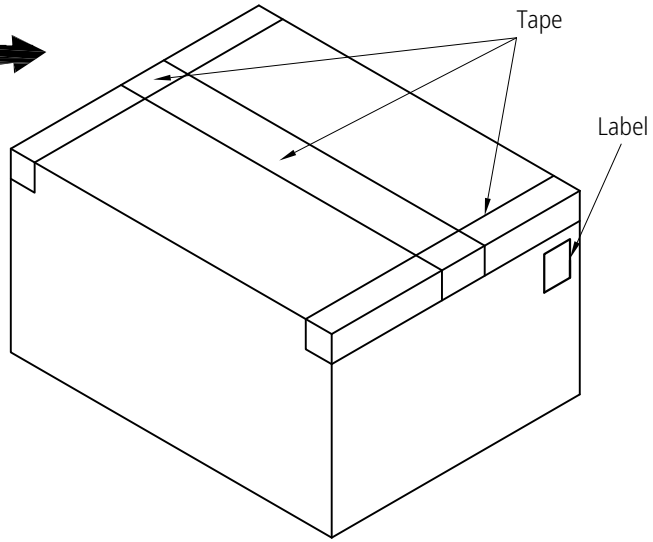

Notes:

1. Q'ty:30 Pcs/Tray, 2x4 Layers=240 Pcs/Carton.
2. Tray Pallet size: 340*170mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED .X ± 0.30 / X.° ± 3° .XX ± 0.20 / .X° ± 2° .XXX ± 0.10 / .XX° ± 1°	PART NO. PDC0240F0001	Prolanv®
	CUSTOMER DRAWING	APPROVED BY Henry	TITLE EN60A series | Power Female. 2PW/12+2S, R/A DIP Type Packaging
	SIZE A4 / UNITS mm[only]	CHECKED BY Poplar	DWG NO. P-PDC24-20
		DRAWN BY Tang	SHEET 2 / 2 · SCALE NA · REV A0

Copyright Shenzhen Prolanv Inc. www.prolanv.com