



专利产品 Patented Product

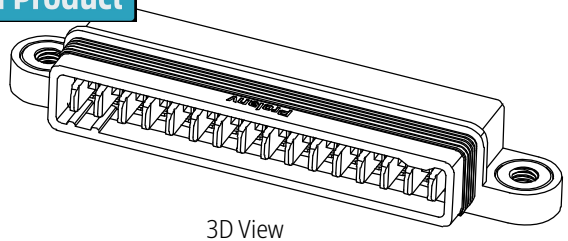



3D View

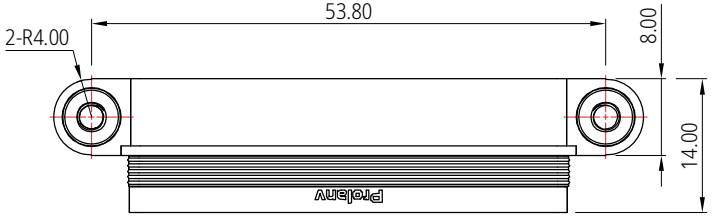

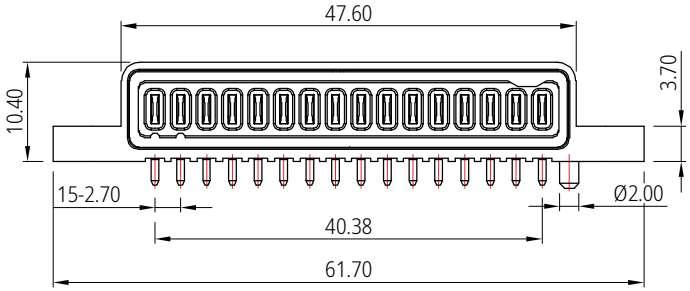


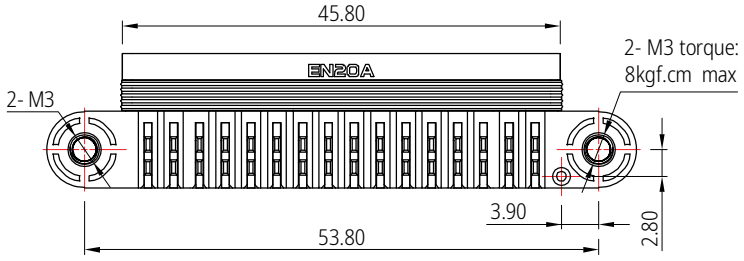




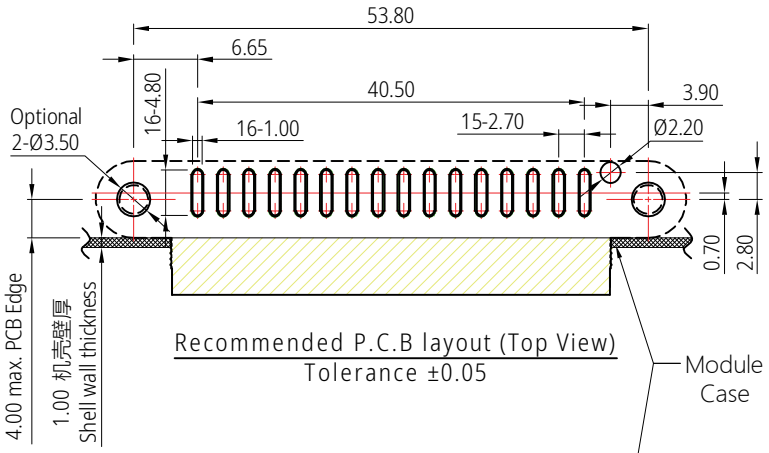

Recommended P.C.B layout (Top View)
Tolerance ±0.05

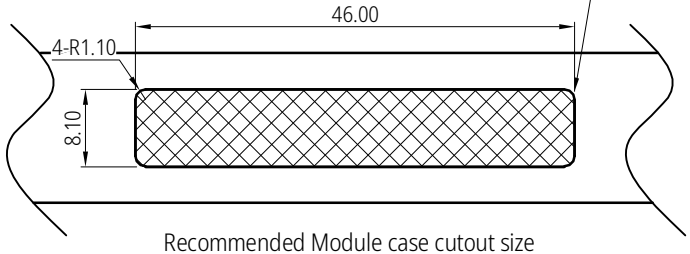

Recommended Module case cutout size
建议机壳匹配的开孔尺寸

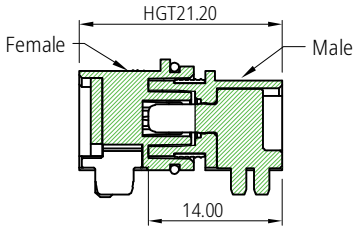

Mating View


Notes:


1. Material Specification
   1-1.Housing: High Temperature Thermoplastic, UL94 V-0,
   1-2.Contact: High Conductivity Copper Alloy,
   1-3.Screw-Hole: Copper Alloy.
2. Plating Specification
   Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 100μ" min. Nickel overall,
3. Electrical performance
   3-1. Voltage Rating: 125v DC max./power blade;
   3-2. Current Rating: 20A max./Per pair power blade;
   3-3. LLCR: initial 0.5mΩ max.,
   finished 1.0mΩ maximum change;
   3-4. Dielectric Withstanding Voltage: 500v AC (RMS) for 60S ;
   3-5. Insulation Resistance: 1000 MΩ min/Power blade.
4. Mechanical Performance:
   4-1. Insertion Force: 9.8N (1.0kgf) max./Per Pair;
   4-2. Withdrawal Force: 3.5~8.5N (0.35~0.86kgf)/Per Pair;
   4-3. Durability Life: 3,000 cycles.
5. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
6. Waterproof Level ⩾IPX6 in the mated connector module state.
7. Operating Temperature Range: -40~125°C.
8. All parts RoHS and Reach compliant.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			
.X± 0.30	.X.°± 3°	PART NO. PDC7110C0001	Prolanv®
.XX± 0.20	.X°± 2°	APPROVED BY Henry	TITLE EN20A series | Power Male R/A DIP Type. 16PW
.XXX± 0.10	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY Yang	DWG NO. PDC71-10
SIZE A4	UNITS mm[only]	DRAWN BY Wang	SHEET 1 / 2 · SCALE 1:1 · REV A2


Copyright Shenzhen Prolanv Inc. www.prolanv.com

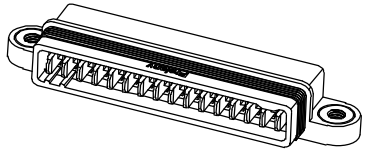


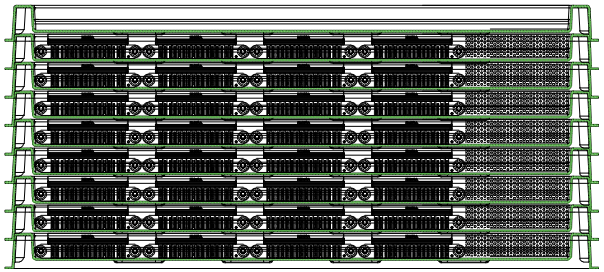

Total: 2x8Layers

20 Pcs/Tray

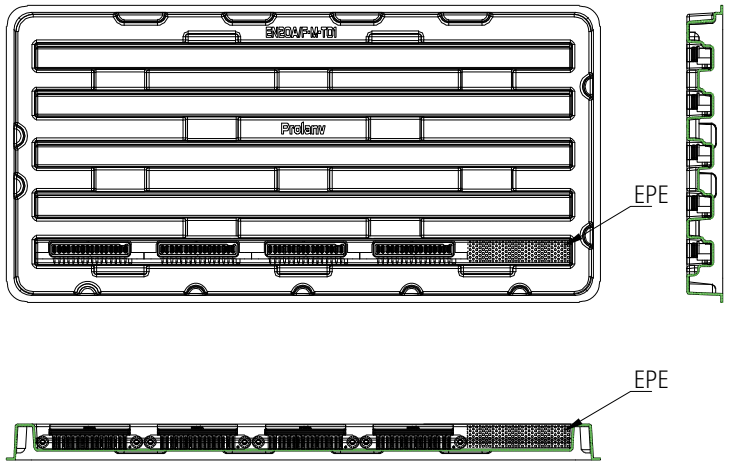

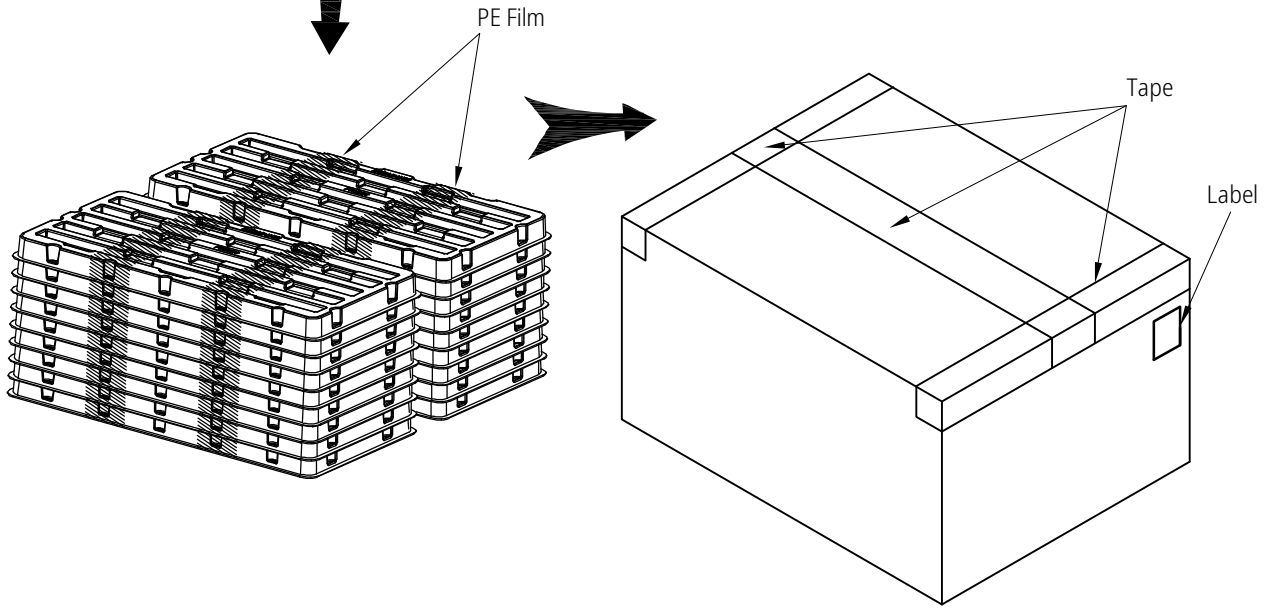

Notes:

1. Q'ty:20 Pcs/Tray, 2x8 Layers=320 Pcs/Carton.
2. Tray Pallet size: 340*170mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED .X± 0.30 X.°± 3° .XX± 0.20 .X°± 2° .XXX± 0.10 .XX°± 1°	PART NO. PDC7110C0001	Prolanv®
	CUSTOMER DRAWING	APPROVED BY Henry	TITLE EN20A series | Power Male R/A DIP Type. 16PW. Packaging
	SIZE A4 / UNITS mm[only]	CHECKED BY Poplar	DWG NO. P-PDC71-10
		DRAWN BY Bing	SHEET 2 / 2 · SCALE NA · REV A1

Copyright Shenzhen **Prolanv** Inc. www.prolanv.com