



Patented product
专利产品

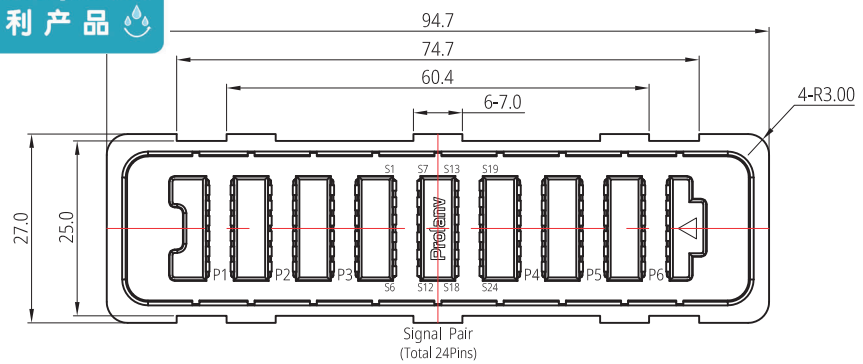


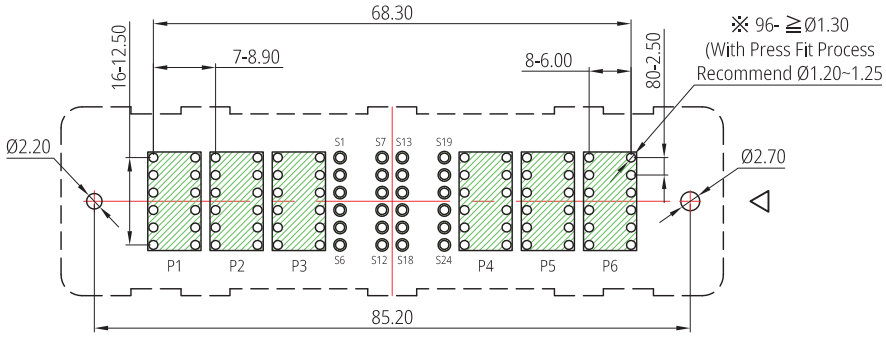


Recommended P.C.B layout (Top View)
Tolerance ±0.05

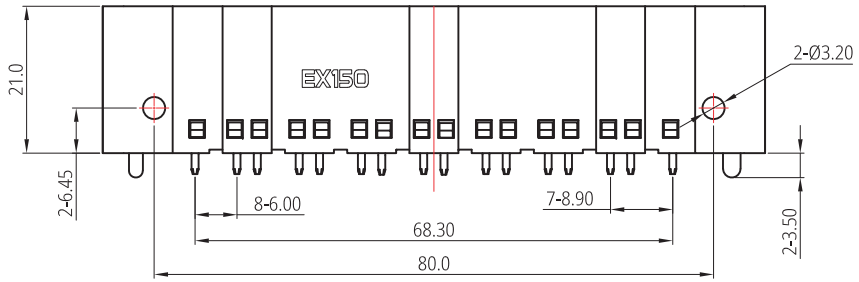




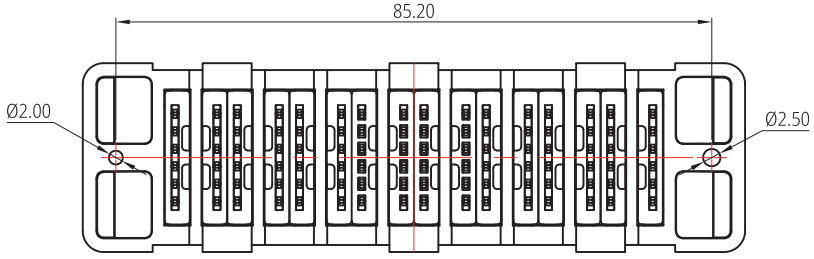

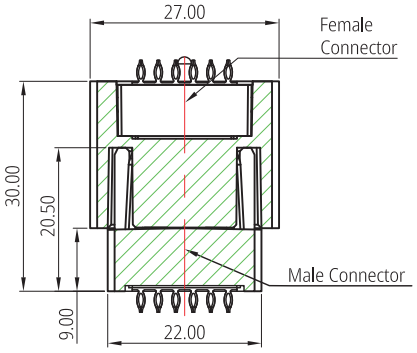

Mating View

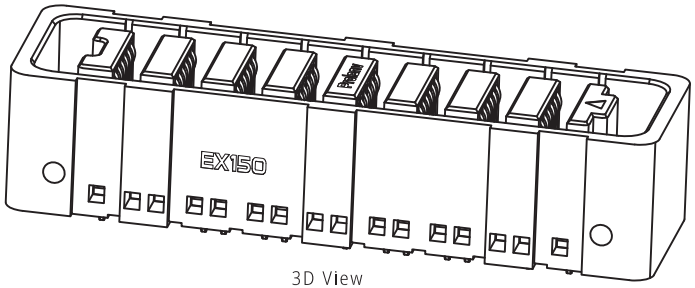

3D View


Notes:
1. Material Specification
 1-1.Housing: High Temperature Thermoplastic. UL94 V-0, Black.
 1-2.Contact: High Conductivity Copper Alloy.
2. Plating Specification:
 2-1.Contact: Gold plating on Contact area, matte Tin 80μ" min. on Tails, and 50μ" min, Nickel overall.
3. Electrical performance
 3-1.Voltage Rating: 600v DC/250v AC/Power Blade, 120v AC/DC/Signal Pin.
 3-2.Current Rating: 150A Max./Per Power Blade, 7.5A Max./Per Signal Pin.
 3-3.LLCR: initial 0.5mΩ max., finished 1.0mΩ maximum change.(per Power Blade) initial 10mΩ max., finished 20mΩ max.(per Signal Pin)
 3-4.Dielectric Withstanding Voltage: 2000v DC rms/Power Blade, 500v DC rms/Signal Pin.
 3-5.Insulation Resistance: 5000 MΩ min/power blade.
4. Mechanical Performance:
 4-1.Insertion force: 24.5N (2.5kgf) max./Per Pair.
 4-2.Withdrawal force: 4.9N (0.5kgf) min./Per Pair.
 4-3.Durability life: 5,000 cycles max.
5. IR Reflow:
 The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
6. Operating Temperature Range: -40~125°c.
7. All parts RoHS and Reach compliant.
8. ※ See SPS-PDC-08 for Terminal details.

Optimized version | Modular waterproof
升级版本．模组化防水结构


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED				PART NO.	Prolanv®
.X ±	0.30	X.° ±	3°	PDC3810F0001	
.XX ±	0.20	.X° ±	2°	APPROVED BY: Henry	TITLE: EX150 | blade Power Female 6PW+24S, Straight Type
.XXX ±	0.10	.XX° ±	1°		
CUSTOMER DRAWING				CHECKED BY: Poplar	DWG NO.: PDC38-10
SIZE		UNITS		DRAWN BY: Kaylee	SHEET: 1 / 2 · SCALE: 1:1 · REV: A3
A4		mm[only]			


Copyright Prolanv Inc. www.prolanv.com

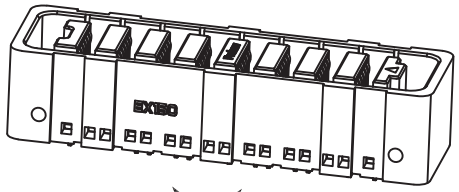



12 Pcs/Tray

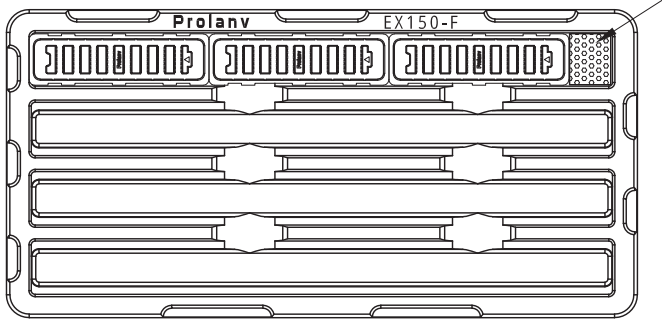

EPE



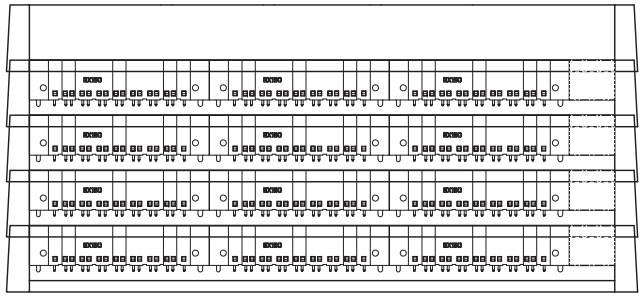

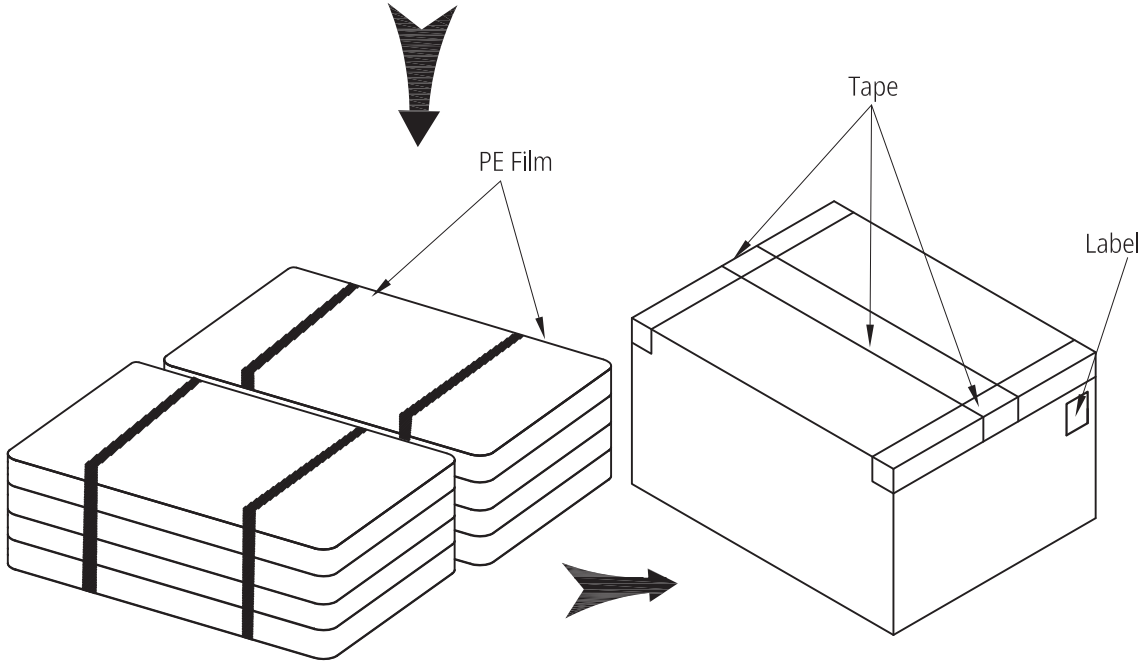

Notes:

1. Q'ty: 12 Pcs/Tray, 2x4 Layers=96 Pcs/Carton.
2. Tray Pallet size: 332*162mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF **Prolanv** AND SHALL NOT BE COPIED OR USED WITHOUT **Prolanv** PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			PART NO.	Prolanv®
.X ± 0.30	X.° ± 3°		PDC3810F0001	
.XX ± 0.20	.X° ± 2°		APPROVED BY	TITLE
.XXX ± 0.05	.XX° ± 1°		Henry	EX150 | blade Power Female 4PW+24S, Packaging
CUSTOMER DRAWING			CHECKED BY	DWG NO.
			Poplar	PDC38-10
SIZE	UNITS		DRAWN BY	SHEET / SCALE / REV
A4	mm[only]		Kaylee	2 / 2 / N/A / A2

Copyright **Prolanv** Inc. www.prolanv.com