


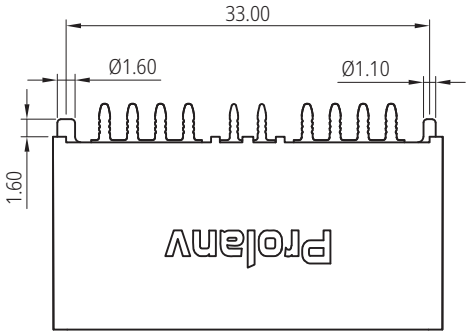


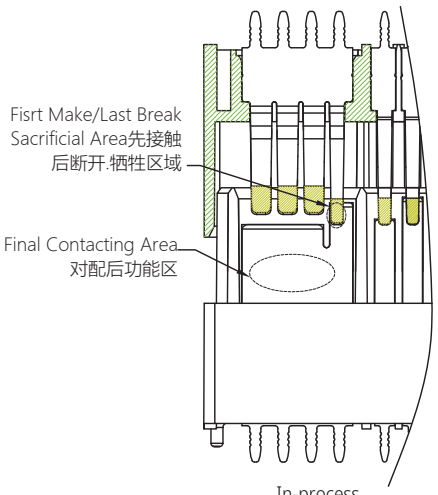

In-process

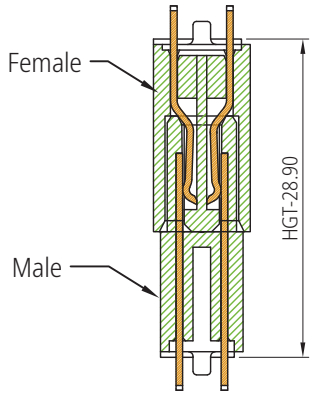



Mating View

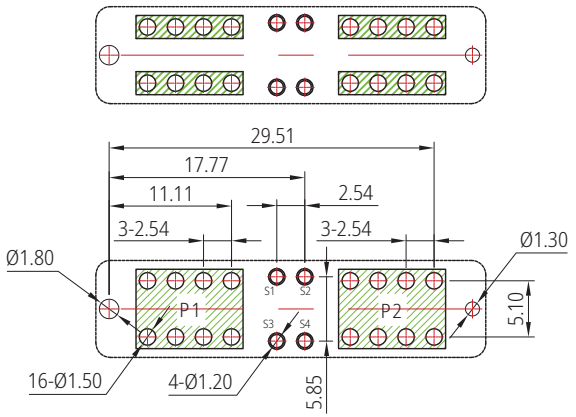



Recommended P.C.B layout (Top View)


Tolerance ±0.05

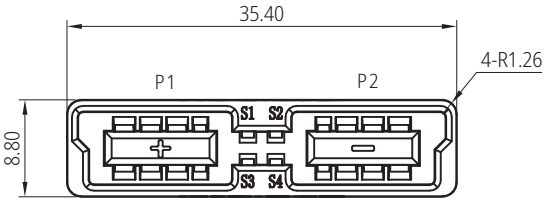



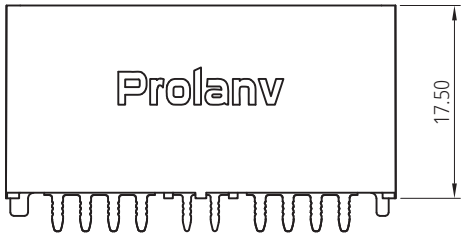

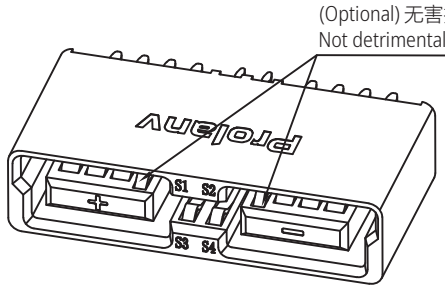

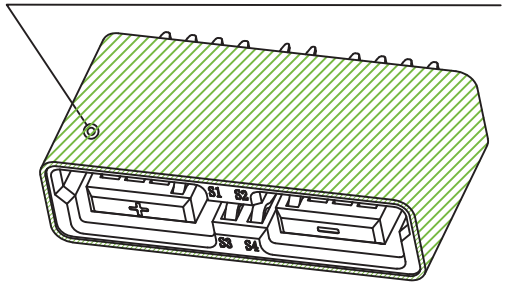

Notes:


1. Material Specification:
   1-1. Housing: High Temperature Thermoplastic. UL94 V-0, Black;
   1-2. Contact: High Conductivity Copper Alloy;
2. Plating Specification:
   2-1. Contact: Gold plating on Contact area, Matte Tin 80μ" min. on Tails, and 80μ" min. Nickel overall;
3. Electrical performance:
   3-1. Voltage Rating: 250v DC/power blade, 120v DC/Signal Pin.
   3-2. Current Rating: 60A (per pair power blade), 3A (Per Signal Pin).
   3-3. LLCR:
   initial 0.6mΩ max., finished 1.0mΩ maximum change.(per pair power blade).
   initial 10mΩ max., finished 10mΩ maximum change.(per signal pin).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms (RMS) for 60s.
   3-5. Insulation Resistance:
   3000 MΩ ,min./Power blade, 500 MΩ min./Signal Pin.
4. Mechanical Performance:
   4-1. Insertion Force: 39.2N (4.0kgf) max.
   4-2. Withdrawal Force: 9.8~34.3N (1.0~3.5kgf).
   4-3. Durability Life: 5,000 cycles max.
5. IR Reflow:
   The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
6. Operating Temperature rang: -40~125°c.
7. All parts RoHS and Reach compliant.

Part Number	PDC5410C0001 普通非防水款 Non-waterproof spec.
Part Number	PDC5411C0001 （可选）预灌胶防水款 (Optional) waterproof spec.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			
.X ± 0.30	.X° ± 3°	PART NO. PDC5410C0001	Prolanv®
.XX ± 0.20	.X° ± 2°	APPROVED BY Henry	TITLE Hi-Current Power Female 4PW (2Pairs)/4S, Straight Type
.XXX ± 0.05	.XX° ± 1°		
CUSTOMER DRAWING		CHECKED BY Poplar	DWG NO. PDC54-10
SIZE A4	UNITS mm[only]	DRAWN BY Kevin	SHEET 1 / 2 · SCALE 1:1 · REV A1

Copyright Shenzhen **Prolanv** Inc. www.prolanv.com




18 Pcs/Tray

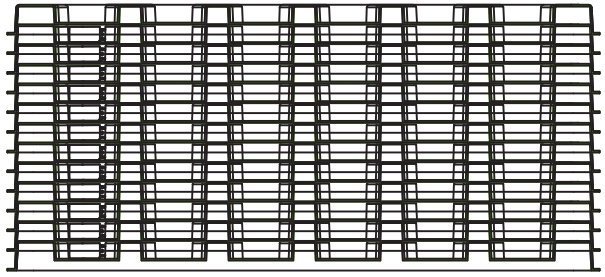


Total: 2x12 Layers


Notes:

1. Q'ty:18 Pcs/Tray, 2x12 Layers=432 Pcs/Carton.
2. Tray Pallet size: 332*162mm.
3. Carton size: 350*350*155mm.

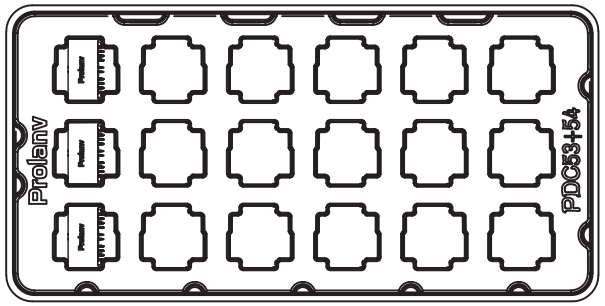



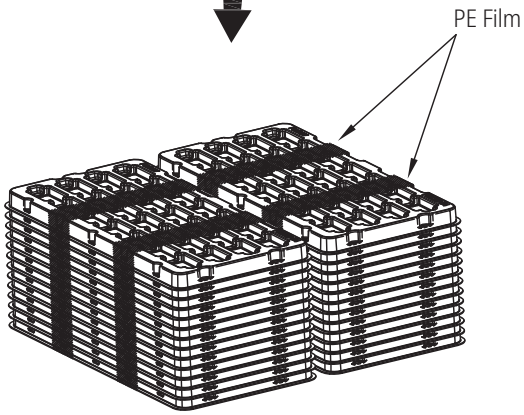

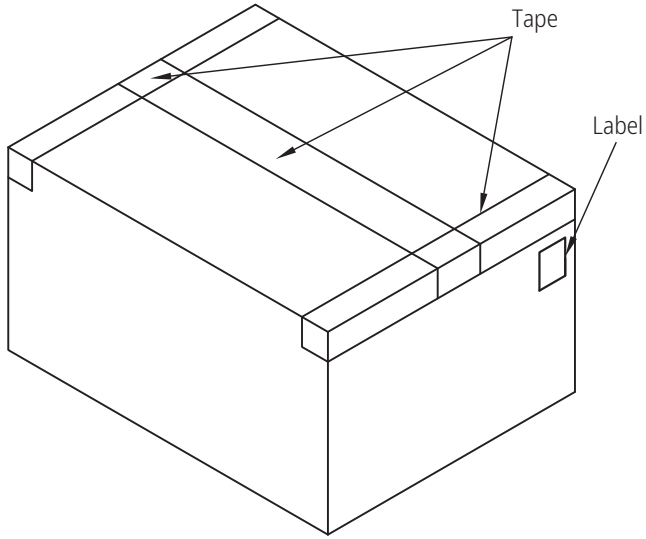



THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED X ± 0.30 / X.° ± 3° .XX ± 0.20 / .X° ± 2° .XXX ± 0.05 / .XX° ± 1°	PART NO. PDC5410C0001	Prolanv®
	CUSTOMER DRAWING	APPROVED BY Henry	TITLE Hi-Current Power Female. 4PW/4S, Straight Type. Packaging
	SIZE A4 / UNITS mm[only]	CHECKED BY Poplar	DWG NO. PDC54-20
		DRAWN BY Kaylee	SHEET 2 / 2 · SCALE NA · REV A0

Copyright Shenzhen **Prolanv** Inc. www.prolanv.com