



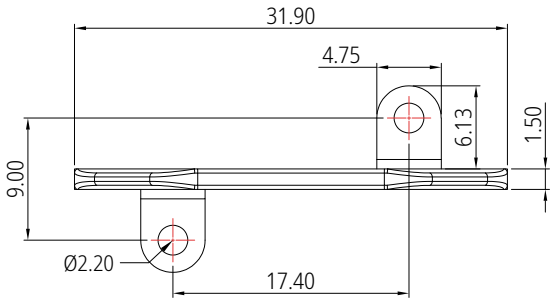


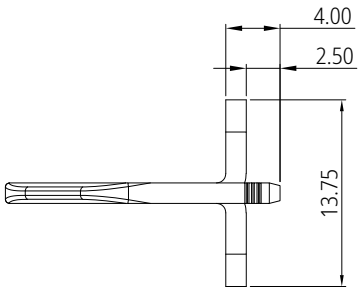

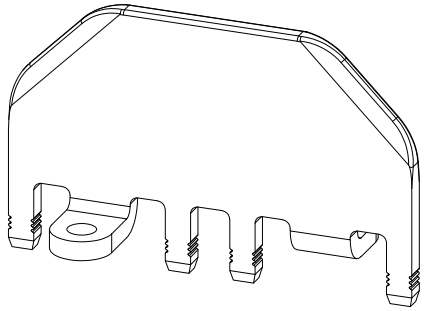


3D View

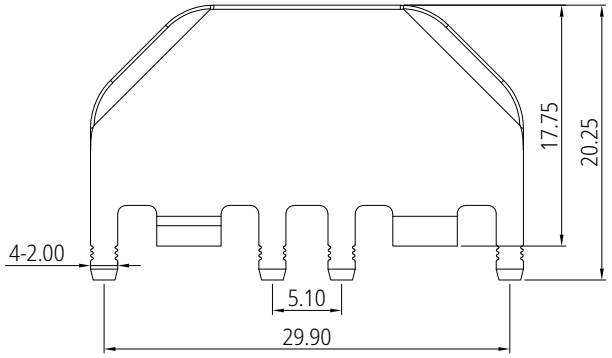

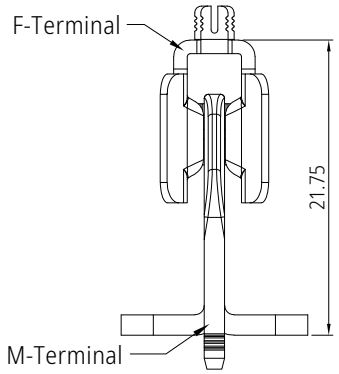

In-Process | Fill Step

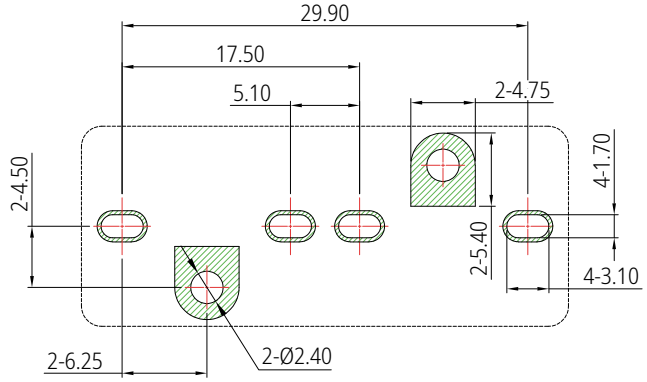

Recommended P.C.B layout (Top View)
Tolerance ±0.05

Notes:
1. Material specifications: High conductivity copper alloy;
2. Plating specifications: Gold plating and Nickel overall.
3.Electrical performance:
 3-1. Voltage/Current rating: 150V DC/75A max.
 3-2. LLCR：Initial maximum 0.6mΩ, finished 1.0mΩ maximum change.
4. Mechanical Performance:
 4-1. Insertion Force: 20N (2.0kgf) max.
 4-2. Withdrawal Force: 5N (0.5kgf) min.
 4-3. Durability Life: 3,000 cycles.
5. IR Reflow:
 The peak temperature on board shall be maintained for 10 seconds at 260±5°c.
6. Operating Temperature rang: -40~150°C.
7. All parts RoHS and Reach compliant.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			
.X ±	0.30	X.° ±	3°
.XX ±	0.20	.X° ±	2°
.XXX ±	0.10	.XX° ±	1°

CUSTOMER DRAWING		PART NO.	PBC03-111
SIZE	UNITS	APPROVED BY	Henry
A4	mm[only]	CHECKED BY	Poplar
		DRAWN BY	Kaylee


Prolanv®

TITLE: Busbar style M-Terminal


DWG NO. PBC03-101

SHEET	SCALE	REV
1 / 2	1:1	A0

Copyright Prolanv Inc. www.prolanv.com




30 Pcs/Tray

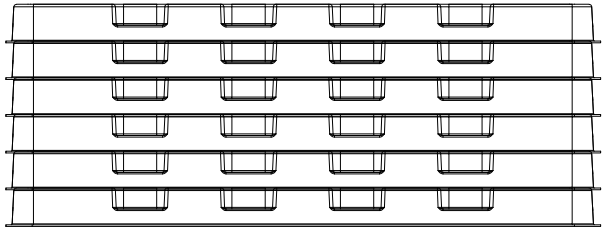


Total: 2x6 Layers


Notes:


1. Q'ty:30 Pcs/Tray, 2x6 Layers=360 Pcs/Carton.
2. Tray Pallet size: 332*162mm.
3. Carton size: 350*350*155mm.

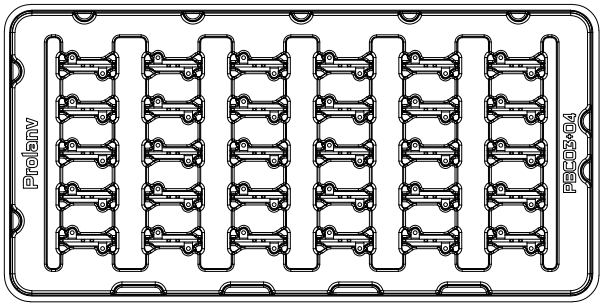



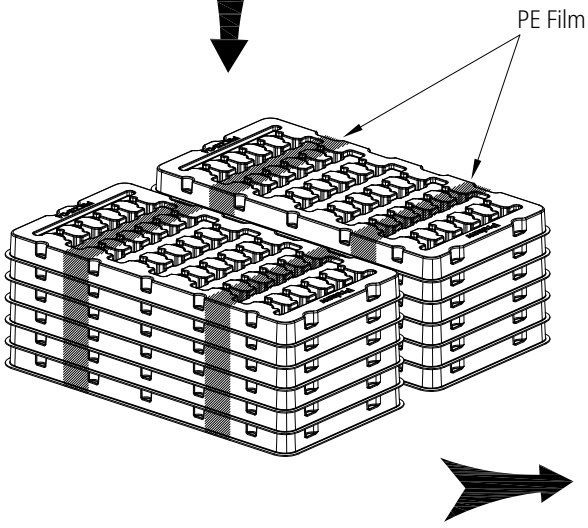

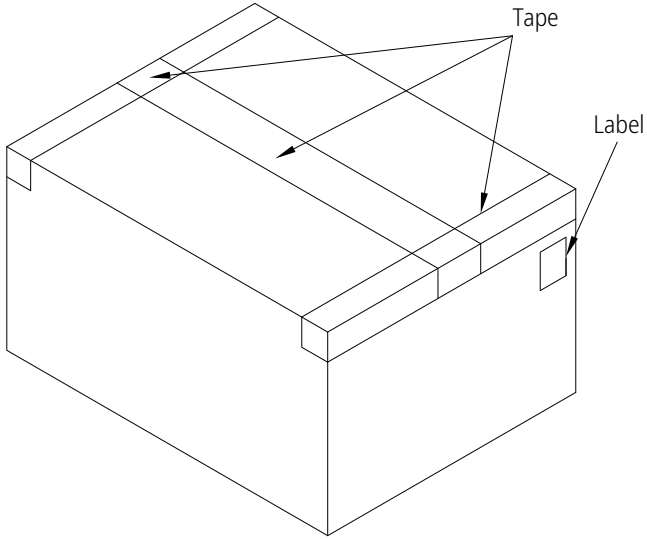



THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. PBC03-111	Prolanv®	
	.X± 0.30	X.°± 3°			
	.XX± 0.20	.X°± 2°	APPROVED BY Henry	TITLE Busbar style M-Terminal Packaging	
	.XXX± 0.05	.XX°± 1°			
	CUSTOMER DRAWING		CHECKED BY Poplar	DWG NO. P-PBC03-10	
	SIZE	UNITS	DRAWN BY Kaylee	SHEET 2 / 2	SCALE NA / REV A0
	A4	mm[only]			

Copyright **Prolanv** Inc. www.prolanv.com