


Patented product
专利产品
抑制涌流 Inhibit inrush current | 防火花 Anti Spark



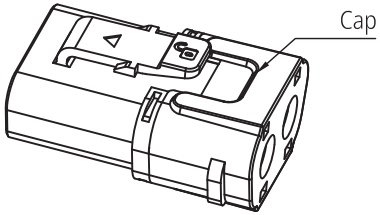



With Cap 3D View




W/O Cap 3D View

Item	P/N	Description
1	PAT0110BT001	AT80 Power Conn. without Cap
2	PAT0110BT002	AT80 Power Conn. with Cap

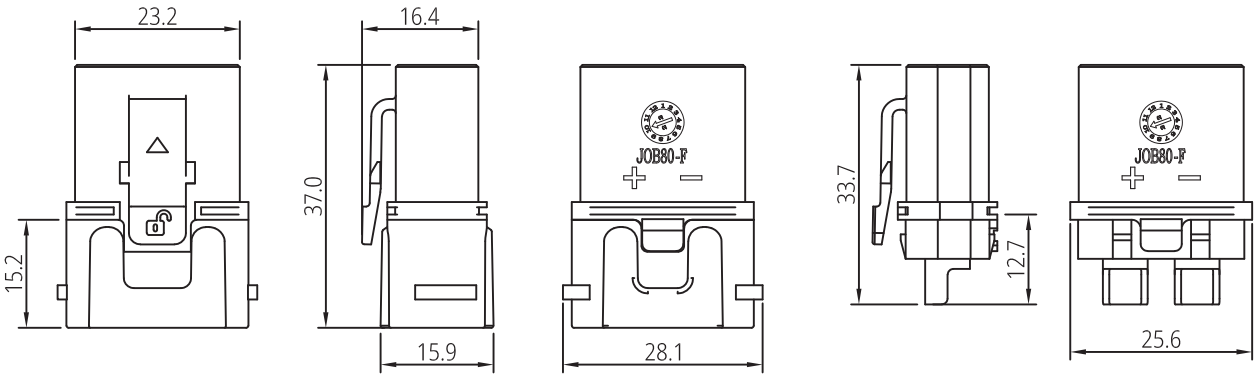

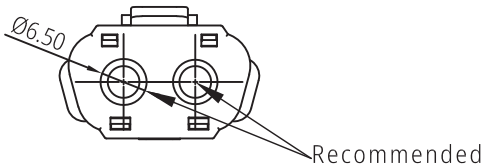

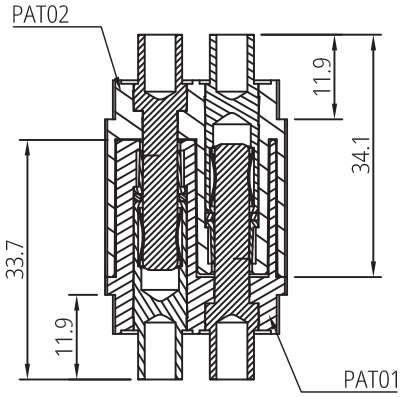

Mating View

Notes:

1. Material Specification
   1-1.Housing: High Temperature Thermoplastic. UL94 V-0.
   1-2.Contact: High Conductivity Copper Alloy.
   1-3. Screw & Nut: Copper Alloy.
2. Plating Specification: Contact: Gold plating overall.
3. Electrical performance
   3-1. Voltage Rating: 200V DC max.
   3-2. Current Rating: 80A max @ per pin.
   3-3. LLCR: 0.80mΩ max (initial); 1.80 mΩ max (final).
   3-4. Dielectric Withstanding Voltage:
   1500v DC rms/Power Pin.
   3-5. Insulation Resistance: 5000 MΩ min/Power Pin.
4. Mechanical Performance:
   4-1. Insertion force: 24.5N (2.5kgf) max @ per pair.
   4-2. Withdrawal force: 6N (0.6kgf) min @ per pair.
   4-3. Durability life: 2,000 cycles max.
5. Operating Temperature Range: -25~+125°c.
6. All parts RoHS and Reach compliant.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION

GENERAL TOLERANCES UNLESS SPECIFIED			
.X ±	0.30	X.° ±	3°
.XX ±	0.20	.X° ±	2°
.XXX ±	0.05	.XX° ±	1°

CUSTOMER DRAWING

SIZE	UNITS
A4	mm[only]

PART NO. PAT0110BT00X

APPROVED BY Mike

CHECKED BY Henry

DRAWN BY Poplar


Prolanv®

TITLE AT80 Power Connector. Wire-Harness Type.


DWG NO. PAT01-10


SHEET	SCALE	REV
1 / 3	1:1	A2

Copyright Prolanv Inc. www.prolanv.com




21 Pcs/Tray

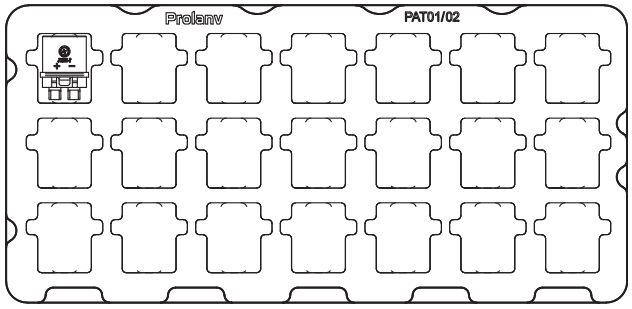







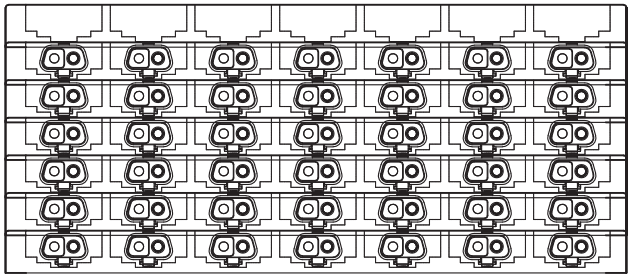

Total: 2x7 Layers

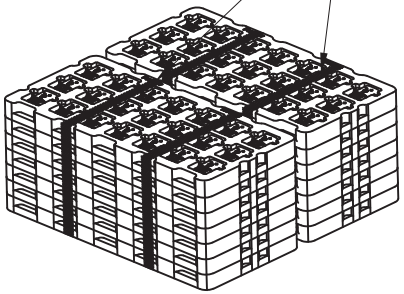

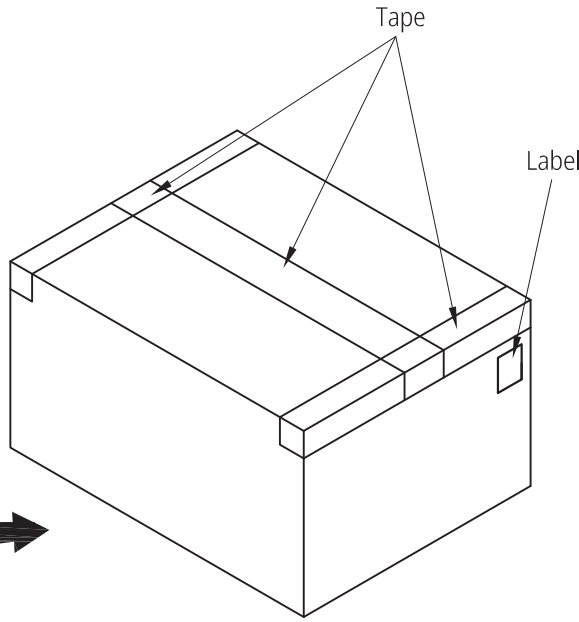

Notes:

1. Q'ty:21 Pcs/Tray, 2x6Layers=252 Pcs/Carton.
2. Tray Pallet size: 330*158*22.5mm.
3. Carton size: 350*350*155mm.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF **Prolanv** AND SHALL NOT BE COPIED OR USED WITHOUT **Prolanv** PERMISSION


GENERAL TOLERANCES UNLESS SPECIFIED			
.X ±	0.30	X.° ±	3°
.XX ±	0.20	.X° ±	2°
.XXX ±	0.05	.XX° ±	1°

CUSTOMER DRAWING			
SIZE	UNITS		
A4	mm[only]		

PART NO.	PAT0110BT00X	Prolanv®	
APPROVED BY	Mike	TITLE	AT80 Power Connector. Wire-Harness Type Packaging
CHECKED BY	Henry	DWG NO.	P-PAT01-10
DRAWN BY	Poplar	SHEET	2 / 3
		SCALE	N/A
		REV	A0


Copyright **Prolanv** Inc. www.prolanv.com




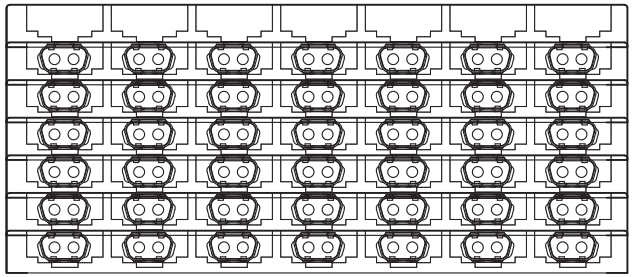

Total: 2x7 Layers

42 Pcs/Tray

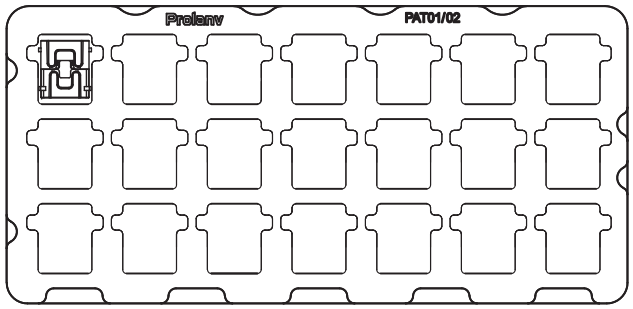







PE Film

Tape

Label

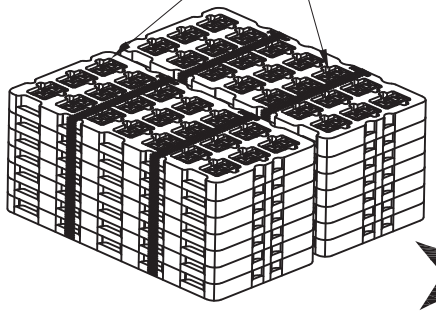

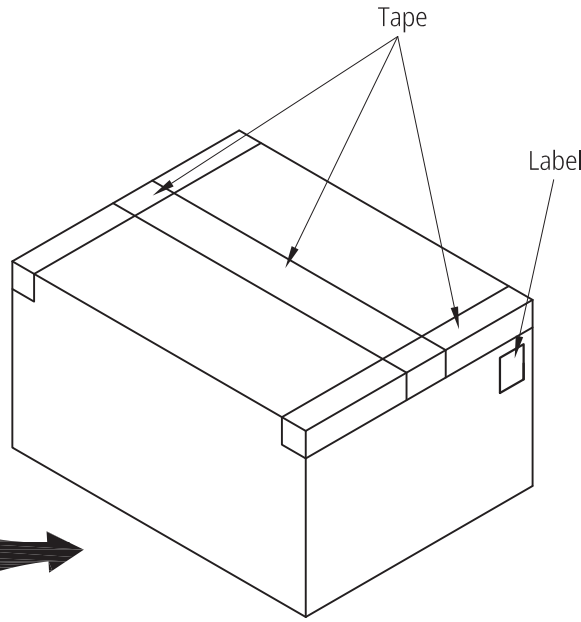

Notes:

1. Q'ty: 42 Pcs/Tray, 2x6 Layers=504 Pcs/Carton.
2. Tray Pallet size: 330*160*22.5mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF **Prolanv** AND SHALL NOT BE COPIED OR USED WITHOUT **Prolanv** PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED .X ± 0.30 / X.° ± 3° .XX ± 0.20 / .X° ± 2° .XXX ± 0.05 / .XX° ± 1°	PART NO. P A T 0 2 - 2 0 3	Prolanv®
		APPROVED BY Mike	TITLE AT80 series Power Connector' Cap
	CUSTOMER DRAWING	CHECKED BY Henry	DWG NO. P-PAT02-03
	SIZE A4 / UNITS mm[only]	DRAWN BY Poplar	SHEET 3 / 3 / SCALE N/A / REV A0

Copyright **Prolanv** Inc. www.prolanv.com